

Nano N25

Intel® Celeron® J4125 Quad Core
Processor Micro Firewall Appliance



Features :


- ◇ All aluminum structure, fanless design ;
- ◇ Onboard Intel Celeron J4125 quad core processor ;
- ◇ 4x Intel i225V 2.5G Lan ports;
- ◇ Support 2x DDR4 Ram Slot, MAX 8G RAM;
- ◇ Support 1*MSATA Slot, 1*2.5" SSD/HDD;
- ◇ Support Desktop, Din rail, VESA wall-mounted etc fixing methods;
- ◇ Support OS :



Specification

| | |
|----------------|--|
| Model | Nano N25 |
| Color | Black (Color can be customized) |
| Material | High-quality all aluminum, surface anodic oxidation |
| Processor | Intel Celeron J4125 (Quad core quad threading, Base frequency 2.0 GHz, Turbo to 2.7GHz) |
| Architecture | Gemini Lake Refresh |
| RAM | Support 2x DDR4 2400MHz Ram Slot, MAX 8G RAM; |
| BIOS | AMI UEFI BIOS |
| Display Chip | Integrated Intel® UHD Graphics 600 |
| Display Port | 1*VGA, 1*HDMI (support synchronous and asynchronous dual display) |
| Front I/O | 1*Power Switch, 2*USB3.0, 1*VGA, 1*COM (support Console) 1*HDMI (resolution up to 3840x2160 @ 30Hz, support audio) |
| Rear I/O | 1*DC Input, 4 Ethernet ports |
| Expansion Slot | Support 1 full height MINI PCIE slot (optional support WIFI/3G/4G, Embedded SIM Slot) |
| Network | 4x Intel i225V 2.5G LAN |
| Storage | 1*MSATA Slot, 1x2.5" SSD/HDD |
| Input Voltage | Support DC 12V |
| Other Function | Auto power on when there is electricity、 Timing boot、 Wake on LAN、 PXE boot |
| Work Temp | 0°C ~ +50°C (Commercial HDD) , -20°C ~ +50°C (Industrial SSD) , Surface air flow |
| Work Humidity | 0% ~ 95% non-condensing |
| Dimension | 134 * 126 * 38.5mm |
| Net Weight | 0.6kg |
| Application | Firewall, VPN, Network Server, Network Security, Router etc. |

Nano N25 Drawing

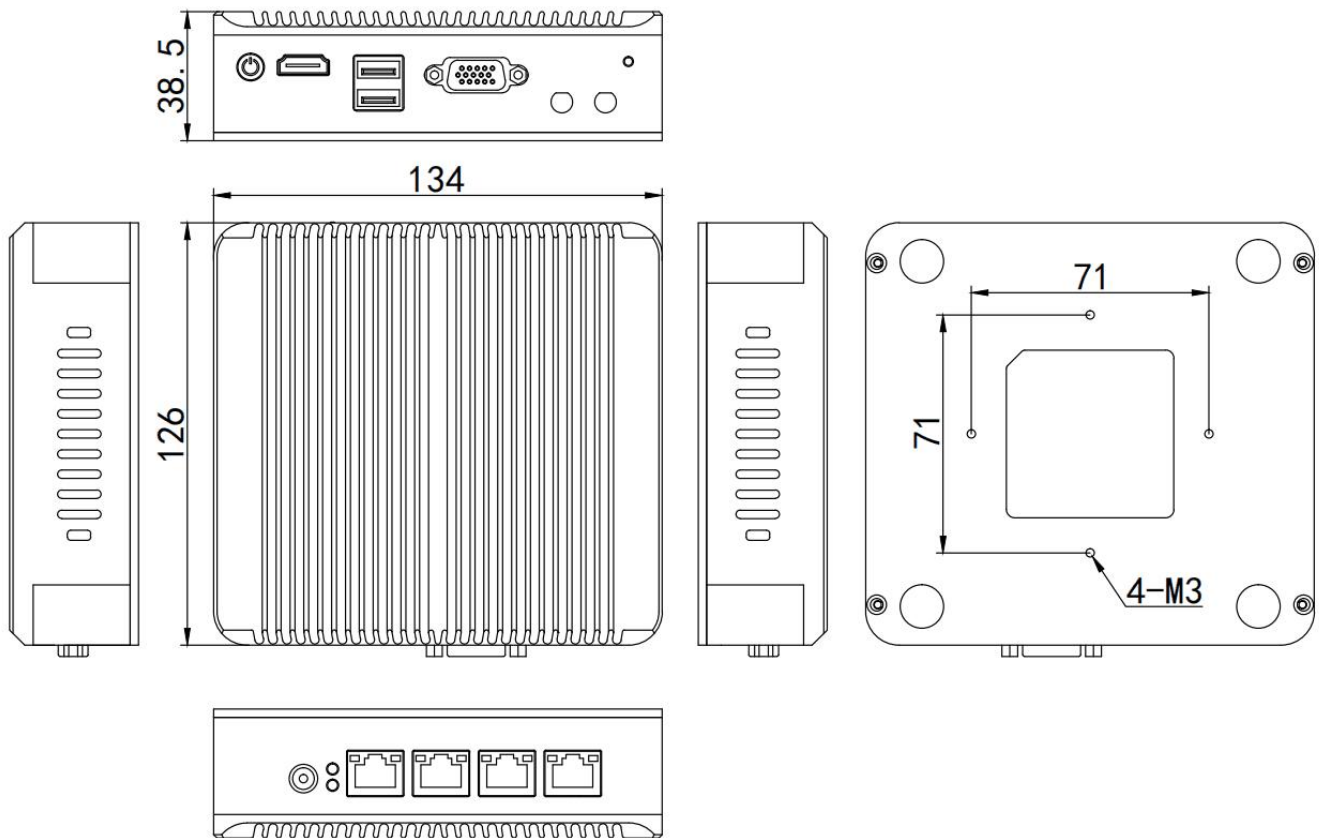

Accessories List

| Name | Quantity | Specification |
|---------------|----------|---|
| Power Adapter | 1 | Optional 12V 5A/ 12V 4A |
| Power Cord | 1 | Any Plug Optional (China, US, EU, UK etc.) |
| VESA Bracket | 1 | Standard |

Order Information

| | | | |
|---------------|----------|----------------------------------|---------------|
| Configuration | Nano N25 | Intel Celeron J4125 Intel i225-V | Standard Port |
|---------------|----------|----------------------------------|---------------|